




PHASE NOISE (1 Hz BW, typical)

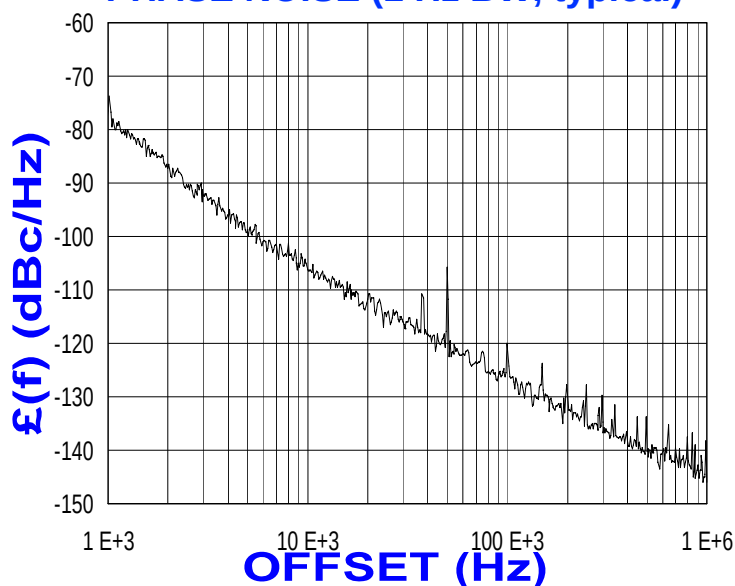

FEATURES

- Frequency Range: 1840 - 1910 MHz
- Step Size: 50 KHz
- PLL-24 - Style Package

APPLICATIONS

- Telecommunications
- Satellite
- Telemetry

PERFORMANCE SPECIFICATIONS

	VALUE	UNITS
Frequency Range	1840 - 1910	MHz
Phase Noise @ 10 kHz offset (1 Hz BW, typ.)	-106	dBc/Hz
Harmonic Suppression (2nd, typ.)	-15	dBc
Sideband Spurs (typ.)	-65	dBc
Power Output	3±2	dBm
Load Impedance	50	Ω
Step Size	50	KHz
Charge Pump Output Current	3.13	μ A
Switching Speed (typ., adjacent channel)	5.5	mSec
Startup Lock Time (typ.)	5.5	mSec
Operating Temperature Range	-40 to 85	$^{\circ}$ C
Package Style	PLL-24	

POWER SUPPLY REQUIREMENTS

Supply Voltage (V_{cc} , nom.)	5	Vdc
Supply Current (I_{cc} , typ.)	40	mA

All specifications are typical unless otherwise noted and subject to change without notice.

APPLICATION NOTES

- AN-107 : How to Solder Z-COMM VCOs / PLLs
- AN-200 : Mounting and Grounding of Z-COMM PLLs
- AN-201 : PLL Fundamentals AN-202 : PLL Functional Description

NOTES:

Reference Oscillator Signal: $5 \text{ MHz} < f_{osc} < 100 \text{ MHz}$
 Frequency Synthesizer: National Semiconductor - ADF4106

