

# SMD Switching Diode

**Comchip**  
SMD Diode Specialist

## CDSF4148S-HF

**RoHS Device**  
**Halogen Free**




### Features

- High Speed.
- Designed for mounting on small surface.
- Extremely thin/leadless package.
- High mounting capability, strong surge withstand, high reliability.
- Use in sensitive electronics protection against voltage transients induced by inductive load switching and lighting on ICs, MOSFET, signal lines of sensor units for consumer, computer, industrial, automotive and telecommunication.

### Mechanical data

- Case: 1005/SOD-323F standard package, molded plastic.
- Terminals: Gold plated, solderable per MIL-STD-750, method 2026.
- Polarity: Indicated by cathode band.
- Mounting position: Any.
- Weight: 0.006 gram(approx.).

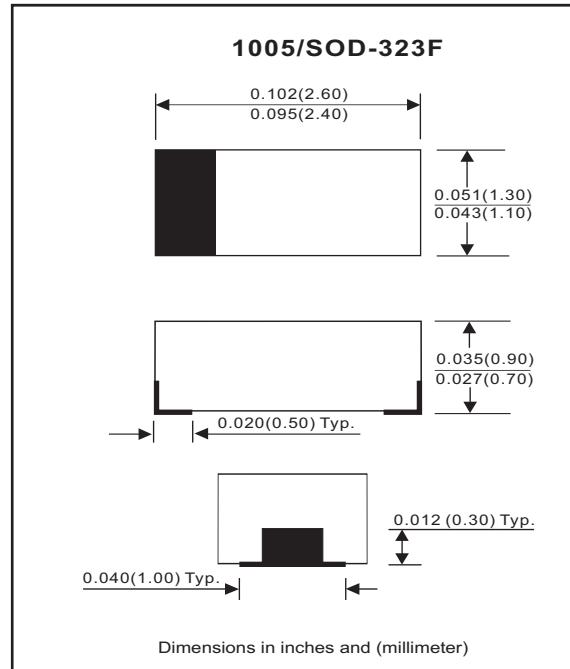

Dimensions in inches and (millimeter)



### Maximum Rating (at TA=25°C unless otherwise noted)

Parameter	Conditions	Symbol	Min	Typ	Max	Unit
Reverse voltage		V <sub>RRM</sub>			100	V
Reverse voltage		V <sub>R</sub>			100	V
Average forward current		I <sub>o</sub>			150	mA
Forward current,surge peak	8.3 ms single half sine-wave superimposed on rate load ( JEDEC method)	I <sub>FSM</sub>		1.5		A
Repetitive peak forward current		I <sub>FRM</sub>			300	mA
Power dissipation		P <sub>D</sub>			350	mW
Thermal resistance junction to ambient air		R <sub>θJA</sub>			286	°C/W
Storage temperature		T <sub>TG</sub>	-55		+150	°C
Junction temperature		T <sub>j</sub>			+150	°C

### Electrical Characteristics (at TA=25°C unless otherwise noted)

Parameter	Conditions	Symbol	Min	Typ	Max	Unit
Forward voltage	I <sub>F</sub> = 100 mA	V <sub>F</sub>			1.0	V
Reverse current	V <sub>R</sub> = 20 V V <sub>R</sub> = 75 V	I <sub>R</sub>			25 2.5	nA uA
Capacitance between terminals	f = 1 MHz, and 0VDC reverse voltage	C <sub>T</sub>			3	pF
Reverse recovery time	I <sub>F</sub> = I <sub>R</sub> = 10 mA, R <sub>L</sub> = 100 ohms, I <sub>rr</sub> = 1mA	T <sub>rr</sub>			4	nS

Company reserves the right to improve product design , functions and reliability without notice.

REV:A

## RATING AND CHARACTERISTIC CURVES (CDSF4148S-HF)

Fig. 1 - Forward characteristics

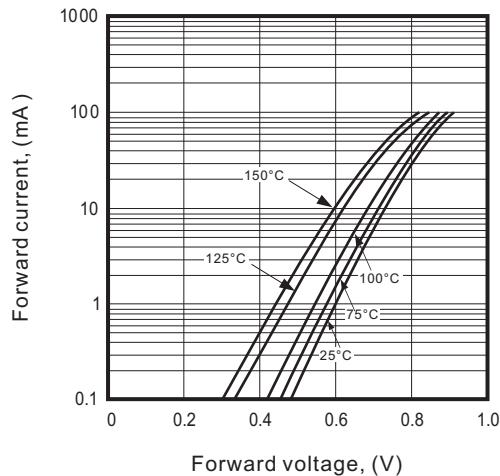


Fig. 2 - Reverse characteristics

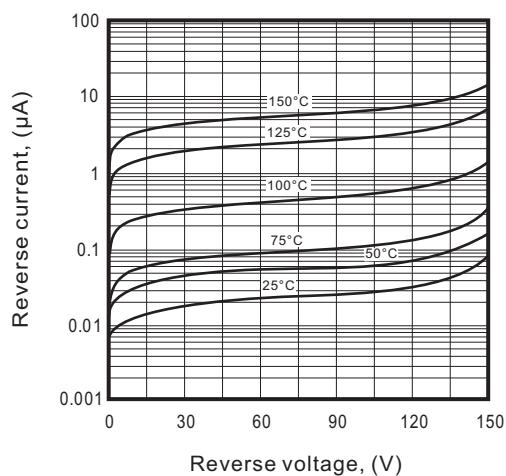


Fig. 3 - Capacitance between terminals characteristics



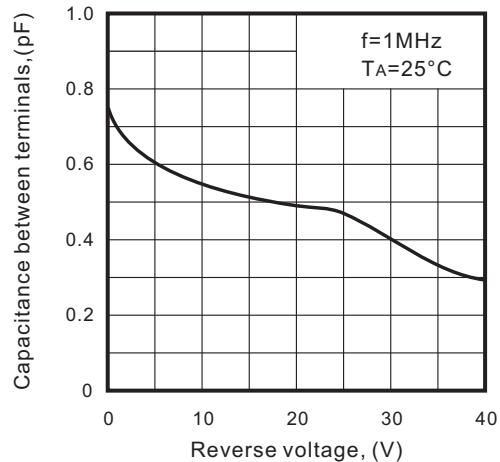


Fig. 4 - Current derating curve

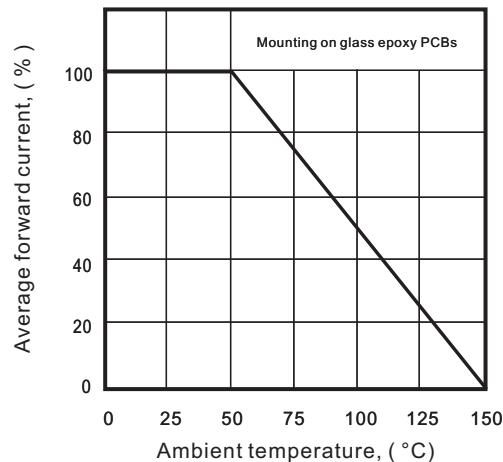

## Reel Taping Specification

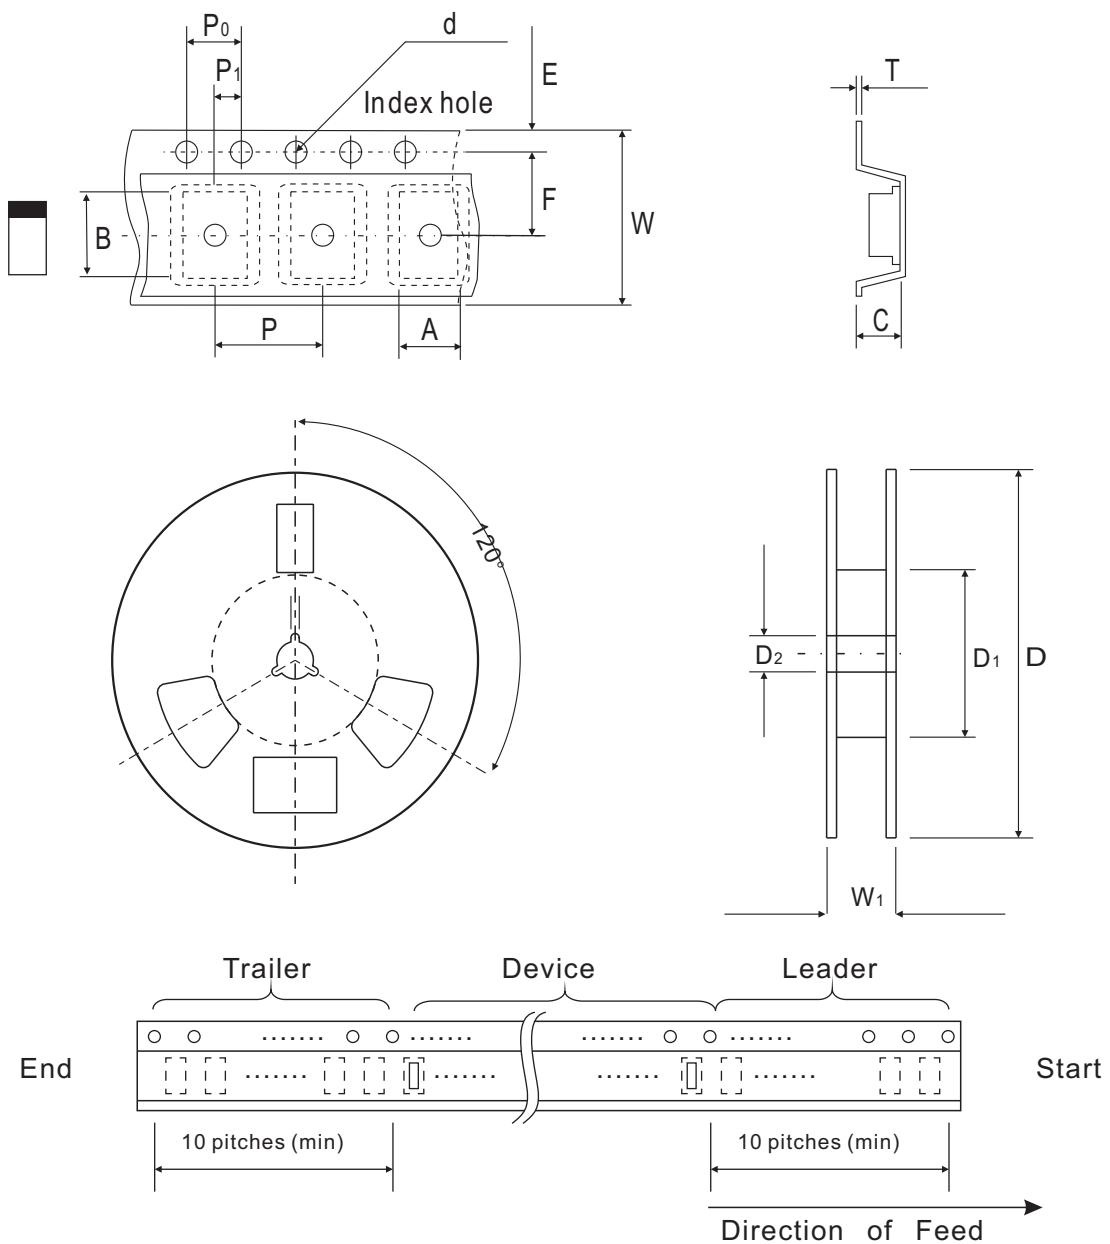


1005 (SOD-323F)	SYMBOL	A	B	C	d	D	D <sub>1</sub>	D <sub>2</sub>
	(mm)	$1.55 \pm 0.10$	$2.65 \pm 0.10$	$1.05 \pm 0.10$	$1.55 \pm 0.05$	$178 \pm 1$	60.0 MIN.	$13.0 \pm 0.20$
	(inch)	$0.061 \pm 0.004$	$0.104 \pm 0.004$	$0.041 \pm 0.004$	$0.061 \pm 0.002$	$7.008 \pm 0.04$	2.362 MIN.	$0.512 \pm 0.008$

1005 (SOD-323F)	SYMBOL	E	F	P	P <sub>0</sub>	P <sub>1</sub>	T	W	W <sub>1</sub>
	(mm)	$1.75 \pm 0.10$	$3.50 \pm 0.05$	$4.00 \pm 0.10$	$4.00 \pm 0.10$	$2.00 \pm 0.05$	$0.23 \pm 0.05$	$8.00 \pm 0.20$	13.5 MAX.
	(inch)	$0.069 \pm 0.004$	$0.138 \pm 0.002$	$0.157 \pm 0.004$	$0.157 \pm 0.004$	$0.079 \pm 0.004$	$0.009 \pm 0.002$	$0.315 \pm 0.008$	0.531 MAX.

## Suggested PAD Layout

SIZE	1005/SOD-323F	
	(mm)	(inch)
A	2.10	0.083
B	1.20	0.047
C	1.20	0.047
D	3.30	0.130
E	0.90	0.035

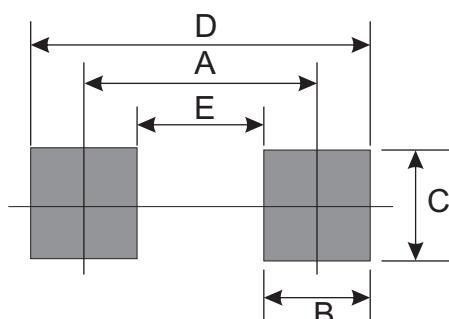

## Standard Packaging

Case Type	Qty Per Reel	Reel Size
	(Pcs)	(inch)
1005/SOD-323F	4000	7